



Technical Data Sheet (Provisional)

CPP FILM – High Seal Strength (JCTH1-HS)


Description

It is a co-extruded Transparent, one side Heat Sealable with high seal strength, One Side Corona Treated Cast Polypropylene (CPP) Film.

- Excellent machinability on packaging lines
• High seal strength
• Good clarity and gloss
• Excellent hot tack on the sealing side
• Hermetic Seal

Applications

- Lamination applications with polyester in Food Packaging, High Speed Packaging.

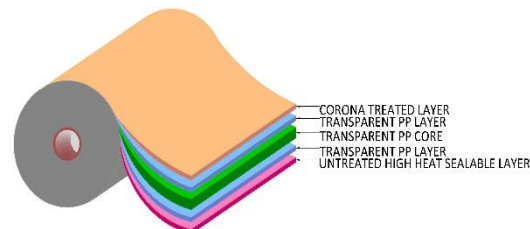

Typical Properties

Table with 4 columns: PROPERTIES, TEST METHOD, UNIT, JCTH1-HS. Rows include Thickness, Grammage, Yield, Coefficient of Friction, Treatment, Haze, Gloss, Tensile Strength, Elongation at break, Seal Initiation Temperature Range, and Sealing Strength.

JPFTM: JINDAL POLY FILMS TEST METHOD, MD: MACHINE DIRECTION, TD: TRANSVERSE DIRECTION, UT: UN-TREATED

Storage & Handling

Jindal CPP film does not require special storage conditions. A storage temperature between 20°C to 30°C is recommended to avoid any deterioration of the film surface properties.

Food Contact

The film complies with EU and FDA regulations. Specific document and MSDS are available on request.

The values provided in the Technical Data Sheet are typical performance data and are believed to be accurate. These are given in good faith, but users are advised to conduct their own tests on representative samples and not on the actual product dispatched.

Last Update: 03/02/2018